


C190 19" CCTV LCD Monitor

The C190 is a high quality Digital Security-LCD Monitor with a fast response time, high contrast ratio and wide viewing angle. It has an advanced video processing scaler and VESA wall mounting compatibility with Multiple Video Inputs. Backed by our 3 year on-site exchange warranty.

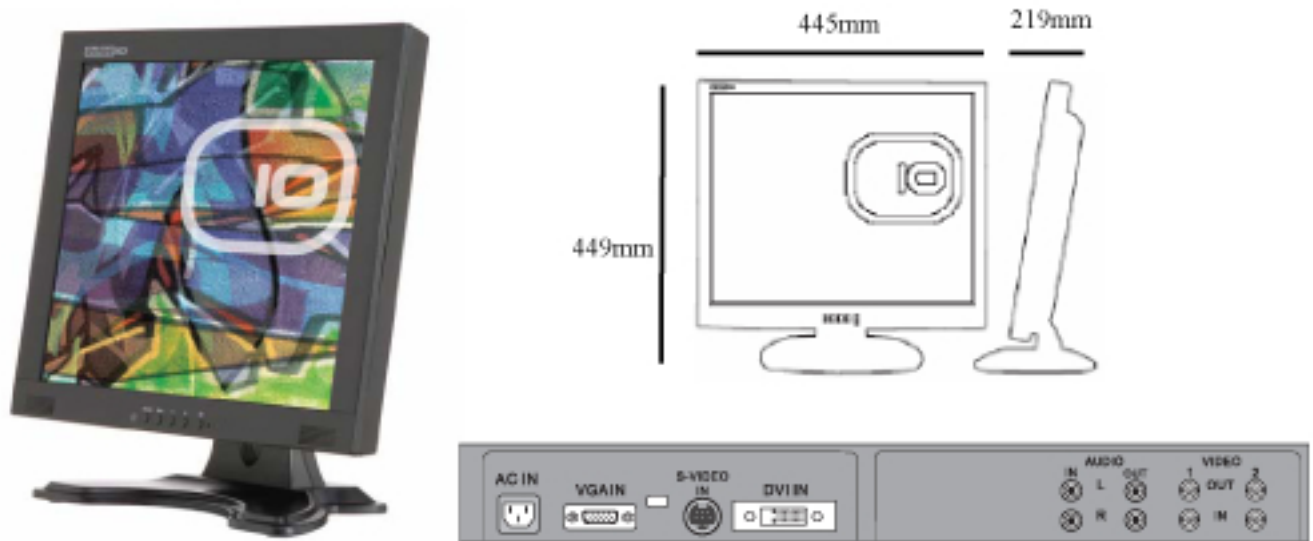

KEY FEATURES

MULTIPLE VIDEO INPUTS
IDEAL FOR WALL MOUNTING
ADVANCED VIDEO PROCESSING SCALER
SUPER FAST 8MS RESPONSE TIME

<p>Monitor Cosmetics: LCD:</p> <p>Pixel Pitch (mm): Native Resolution: Scan Frequency: View Angle: Display Area (mm): Display Colour: Contrast Ratio: Brightness: Response Time (Tr+Tf): Speakers: Anti-theft Security: Compatibility:</p> <p>Input Video Signal:</p> <p>Output Video Signal: Output Audio Signal: Input power source: Power Management (EPA Compliant) Environment: Tilt Angle: Weight: Dimensions (W x D x H): VESA Wall Mount Compliant: Warranty:</p>	<p>Black bezel with black stand and black rear cabinet 19.0" active matrix, thin film transistor (TFT) LVDS, View Size (WxH) 301mm x 376mm 0.294(H) x 0.294(W) SXGA 1280x 1024 (1.3 Megapixels) Horizontal: 30kHz - 80kHz Vertical: 50Hz - 75Hz Horizontal: 150° Vertical: 130° 338(H) x 270(V) 16.2 Million 500:1 300 cd/m² 8ms 2X2W Kensington® Lock Windows 95/98/98SE/Me/NT4/2000/XP, Mac OS, Macintosh, Linux Plug & Play - DDC1/2B</p> <p>Analogue: (Connector: 15 pin D-sub) 0.7 Vp-p separate sync. TTL level, RGB analogue, Detachable cable. S-Video 2 X Composite Video BNC Digital: (DVI connector) Detachable cable Analogue: 2 X Video composite BNC Analogue: Audio L&R RCA AC 100-240V, 50-60Hz Normal operation: < 50 W Off/Suspend/Stand-by mode: < 1W Operation</p> <p>Temperature: 0 - 40°C Humidity: 20% - 80% Max. forward tilt: 5° Max. backward tilt: 35° Net: 7.20kg. Gross: 9.8kg 445 x 219 x 449mm 100mm x 100mm. Three year on-site exchange</p>
---	---

Compliant with ISO-13406-2 regarding pixel faults. Specifications are subject to change without notice.

