


CS RANGE

The CS Light is a general purpose, low cost emergency luminaire suitable for both external and internal environments. Comprising of a moulded self extinguishing polycarbonate base fitted with a clear Fresnel diffuser, suitable for use on escape routes (850 degrees C Hot-wire test, defined by ICEL). The diffuser is attached by captive screws and gasketed to the base to provide a seal to IP65. The gear tray is hinged for ease of installation. Cable knockouts are provided in the ends and a BESA entry in the base complying with the requirements of BS5433 and suitable for incorporation into an emergency lighting system complying with BS5266: 1988 the CS Light can be fitted with universal legend kits (part no. ULK) making them suitable for use as an external IP65 exit sign. It can be readily recessed with the optional recessing flange; available in white or special finishes, such as brass and chrome, to order. Dual-purpose operation, easily wired for non-maintained or maintained therefore providing single unit stocking solution.

Typical Applications

- Student Accommodation
- High Bay Warehouses
- Sports Halls
- Offices/Factories
- Shops/Shopping complexes
- Hotels/Public Houses

- IP65 (Weatherproof)
- Polycarbonate/ABS Construction
- Fresnel Diffuser
- Hinged Gear Tray
- Can be recessed
- IP65 Exit Signs
- Self-Contained
- Centrally Supplied

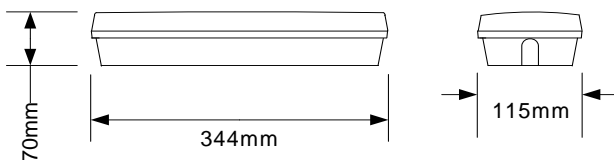

ORDER NO	CS8M/NM
MODE	MAINTAINED / NON MAINTAINED
LAMP TYPE	8W T5
POWER CON	7VA
BATTERY	2.4V 4AH
DURATION	3 HOURS
WEIGHT	1.2KG
OUTPUT	100 LUMENS
DIMENSIONS H X W X D	355 x 115 x 76 mm

Mounting Height (M)	3.3	9.6	5.2	1.7	OPEN AREAS 0.5 LUX MIN (ANTI-PANIC)
2.5	3.3	9.6	5.2	1.7	OPEN AREAS 0.5 LUX MIN (ANTI-PANIC)
4.0	2.4	9.5	5.0	0.8	OPEN AREAS 0.5 LUX MIN (ANTI-PANIC)
2.5	2.0	6.5	3.5	1.6	ESCAPE ROUTE 1.0 LUX MIN (NORMAL RISK)
4.0	1.4	5.4	2.5	0.8	ESCAPE ROUTE 1.0 LUX MIN (NORMAL RISK)