

Part Number(s)	VMIS/R (red/boxed fused) VMIS/W (white/boxed fused)	CE
Description	Fire System - Secure Mains Voltage Safety Isolator	

Introduction

This product provides a secure method for *safety isolating* the mains voltage supply to fire systems in accordance with BS 5839 Part1 2002.

Both the Live and Neutral supply is switched and a fuse is also provided.

The supply can only be isolated by an **authorised person**, by means of a keylock switch. The key is removable in both ON/OFF positions.

The fuse cannot be removed without taking the cover off.

A *Green LED* is used to indicate mains present at the switched output.


When in the OFF position the FUSE is disconnected from the supply.



General Installation

The unit is supplied in a complete enclosure. The enclosure is of a standard single gang format with preformed holes for mounting on a surface or 20mm conduit box. The unit can be accessed by rectangular surface trunking. Please follow the latest IEEE electrical wiring practices.

Connections

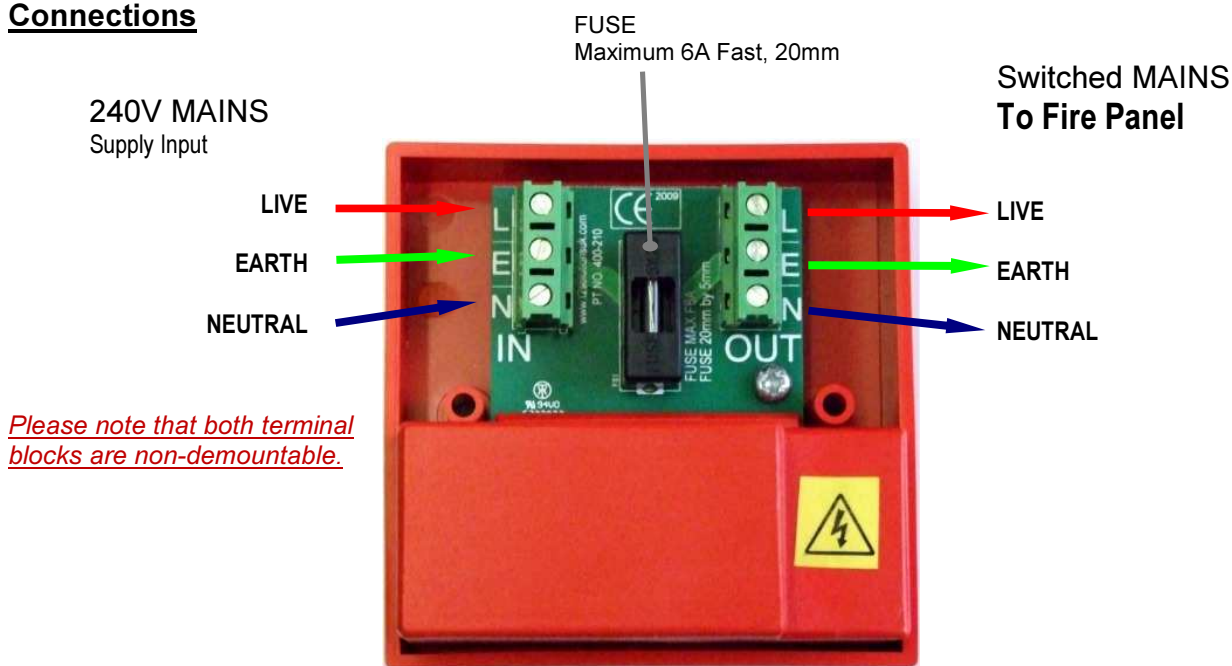

Technical Data



Working Voltage :	250VAC	Weight	175g
Switch Contact Rating:	Double Pole – 250VAC 4Amp	Switch Surge Rating	80Amp
FUSE Rating:	Max - 6A Fast (20mm) supplied	KEY NUMBER	901
Enclosure Material	RoHS Compliant FR ABS	Housing Size:	Single gang: W.86 x L.86 x H.56.5 mm

Part Number(s)	VMIS/R (red/boxed fused) VMIS/W (white/boxed fused)	CE
Description	Fire System - Secure Mains Voltage Safety Isolator	

Introduction

This product provides a secure method for *safety isolating* the mains voltage supply to fire systems in accordance with BS 5839 Part1 2002.

Both the Live and Neutral supply is switched and a fuse is also provided.

The supply can only be isolated by an **authorised person**, by means of a keylock switch. The key is removable in both ON/OFF positions.

The fuse cannot be removed without taking the cover off.

A *Green LED* is used to indicate mains present at the switched output.


When in the OFF position the FUSE is disconnected from the supply.



General Installation

The unit is supplied in a complete enclosure. The enclosure is of a standard single gang format with preformed holes for mounting on a surface or 20mm conduit box. The unit can be accessed by rectangular surface trunking. Please follow the latest IEEE electrical wiring practices.

Connections

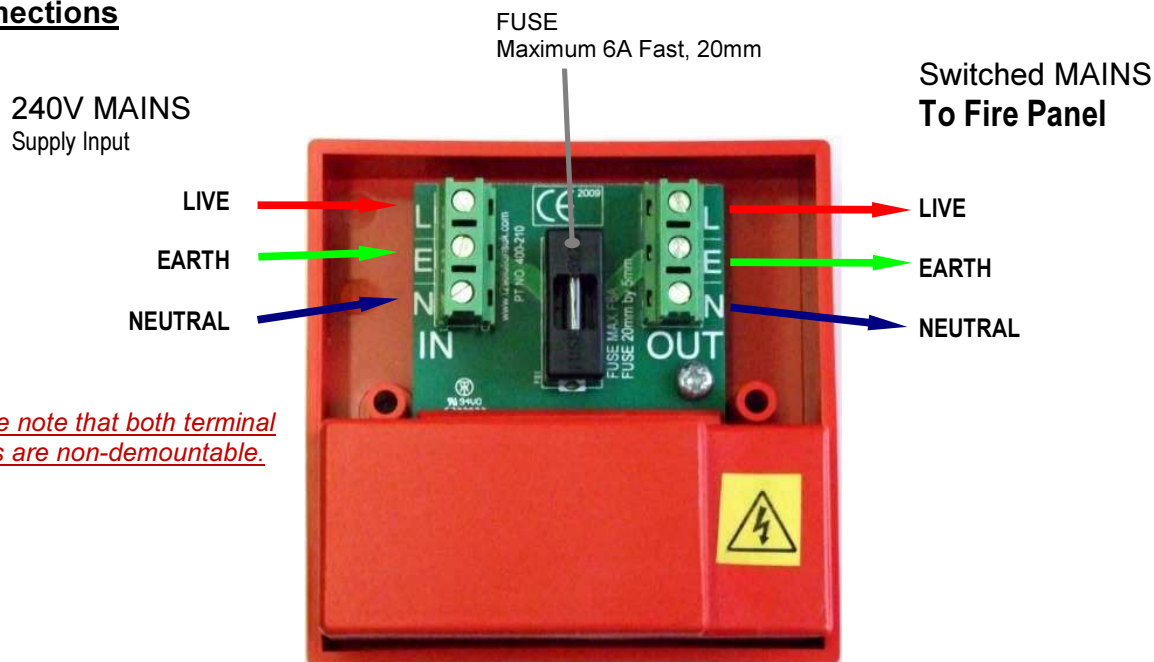

Technical Data



Working Voltage :	250VAC	Weight	175g
Switch Contact Rating:	Double Pole – 250VAC 4Amp	Switch Surge Rating	80Amp
FUSE Rating:	Max - 6A Fast (20mm) supplied	KEY NUMBER	901
Enclosure Material	RoHS Compliant FR ABS	Housing Size:	Single gang: W.86 x L.86 x H.56.5 mm

Document Ref: IS/VMIS/Iss2-01/04/16